

style

Product data sheet no. 9141 - R-05

Issue: March 2022

**SPORTEC® style** protects subfloors from damage by falling heavy objects, e.g. in weightlifting areas of fitness centres or training facilities. Even if not themselves damaged by falling weights, conventional floor surfaces transmit impact shock which often results in serious damage to the concrete subfloor. **SPORTEC® style** avoids this deep-impact damage while providing outstanding sound deadening as well. **SPORTEC® style** with a surface of SPORTEC® UNI versa can also be used outdoors.


**Material**

Material:

Polyurethane-bonded recycling tyre rubber granules with a surface layer made of SPORTEC® floor coverings.

**Product design**

Colour(s):

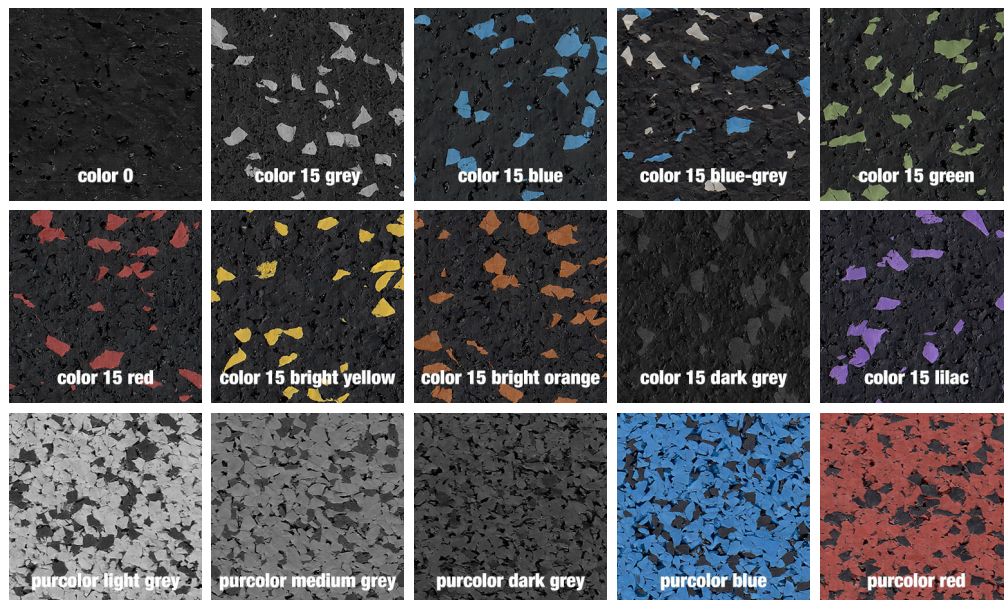


The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

style

Product data sheet no. 9141 - R-05

Issue: March 2022

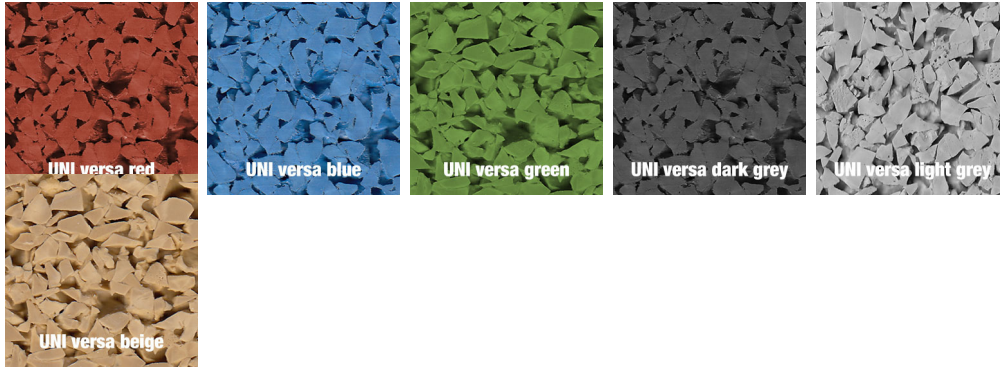

Surface: SPORTEC® color (with 15% EPDM)  
 SPORTEC® purcolor  
 SPORTEC® UNI versa (only for 30mm)

Lower side: dimpled base with a reinforcing mesh  
 colour of base adapted to colour of floor covering top layer (black, grey or red)

Note: Standard colours for color 15: black (color 0), blue, red, grey, blue-grey  
 other colours for color 15: green, bright yellow, bright orange, purple, dark grey  
 low colour differences are conditional of material

**Dimensions / Tolerances / Weight**

Thickness(es): 30 mm (± 2 mm)  
 70 mm (± 2 mm)

Length x width: 500 mm / 500 mm (± 0.8 %)  
 1000 mm / 500 mm (± 0.8 %) (only for 30mm)  
 1000 mm / 1000 mm (± 0.8 %) (only for 30mm)

The product data sheet is not subject to any change service! All information is without guarantee.  
 Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

Area weight:	approx. 27.0 kg/m <sup>2</sup> (at 30 mm) approx. 49.6 kg/m <sup>2</sup> (at 70 mm)
Weight slab:	at 30 mm: approx. 6.8 kg (at 500 mm x 500 mm) approx. 13.6 kg (at 1000 mm x 500 mm) approx. 27.0 kg (at 1000 mm x 1000 mm)
	at 70 mm: approx. 12.4 kg (at 500 mm x 500 mm)

## Product Testing

Fire resistance:	$E_{fl}$ (B2) <sup>a,c</sup> (EN 13501-1) $C_{fl-s1}$ (B1) <sup>b</sup> (EN 13501-1)
Tensile strength:	min. 0.7 N/mm <sup>2</sup> (EN ISO 1798)
Elongation at break:	min. 70 % (EN ISO 1798)
Hardness:	60 ± 5 Shore A (DIN 53505)
Temperature range:	-30°C to 80°C (internal tested)
Force reduction:	approx. 45 % (at 30 mm) (internal tested) approx. 70 % (at 70 mm) (internal tested)
Ball rebound:	approx. 95 % (at 30 mm) (internal tested)
Abrasion:	depending on tile surface max. 200 mm <sup>3</sup> <sup>a</sup> (DIN 53516) max. 450 mm <sup>3</sup> <sup>b</sup> (DIN 53516)
Coefficient of friction:	> 0.3 μ (DS) (EN 13893)
Anti-slip property:	R 10 (DIN 51130)
Anti-slip properties:	C <sup>c</sup> (DIN 51097) (wet-loaded barefoot areas)

Step sound insulation:	Tested according to DIN EN ISO 10140-3:2015-11 24 dB (at 30 mm) 28 dB (at 30 mm tile + Team Cup 10 mm) 30 dB (at 30 mm tile + Supercell DC2 10 mm) 29 dB (at 70 mm) 34 dB (at 70 mm tile + Team Cup 10 mm) 39 dB (at 70 mm tile + Supercell DC2 10 mm)
Remaining deformation:	0.09 mm (ISO 24343-1)
Thermal resistance:	0.172 m <sup>2</sup> K/W (at 30 mm) (DIN EN 12664:2001)
Light fastness:	depending on tile surface 2-3 <sup>a</sup> (grey scale) (DIN EN 105-B02:1999-09) 4 <sup>b,c</sup> (grey scale) (DIN EN 105-B02:1999-09)

VOC emission rating:



## Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® style**. The latest version of the Installation Recommendation can be downloaded at the website of KRAIBURG Relastec GmbH & Co. KG.

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

page 4 of 5

**Other**

Other:

(a tile surface with SPORTEC® color 15)

(b tile surface with SPORTEC® purcolor)

(c tile surface with SPORTEC® UNI versa)

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on [www.kraiburg-relastec.com/sportec](http://www.kraiburg-relastec.com/sportec)

page 5 of 5